


# SSG10

## Spur gearhead

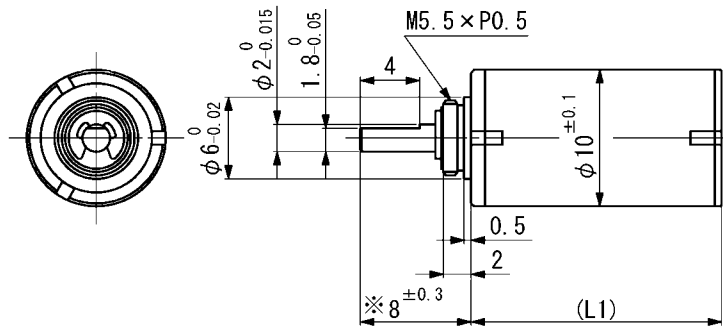

Dimension in mm

Note) Dimension marked ※ is measured with shaft pushed against gearhead.

For combination with motors: SCL10-12, SCL10-18, SCL10-30

General specifications	SSG10	
Housing material	Metal	
Geartrain material	Metal	
Recommended max. input speed	10000	rpm
Operating temperature range	-10...+60	°C
Max. backlash at no-load with 6 stages	≤ 7	°
Bearings on output shaft	Sintered sleeve bearings	
Max. shaft radial load (6 mm from flange)	3	N
Max. shaft axial load	1	N
Max. shaft press fit force	20	N
Shaft radial play	≤ 0.03	mm
Shaft axial play	≤ 0.2	mm

Ratio (nominal)	Stage	Gearhead length, L1 [mm]	Gearhead weight [g]	Max. allowable torque [mNm]		Length with motor [mm]				Efficiency [%]	Direction of rotation	
				Continuous	Intermittent	SCL10-12	SCL10-18	SCL10-30				
15 : 1	3	14	5.4	12	30	27	32.1	44			73	≠
29 : 1	4	16	6.2	12	30	29	34.1	46			66	=
49 : 1	5	18	7	12	30	31	36.1	48			59	≠
72 : 1	5	18	7	12	30	31	36.1	48			59	≠
93 : 1	5	18	7	12	30	31	36.1	48			59	≠
262 : 1	6	20	7.9	12	30	33	38.1	50			53	=